

SHADOWSPEC UNITY™

THE EVOLUTION OF SHADE



PATENT-PENDING TECHNOLOGY

SHADOWLIFT™



Gas-assisted, anti-gravity, easy lift. The most advanced umbrella deployment system in the industry.

SHADOWGLIDE™



Using calculated geometry and expert engineering to open or close your umbrella in 3 seconds.

SHADOWLOCK™



Integrated into the mast of the umbrella, a functional solution to 360 degree umbrella rotation.

SHADOWHUB



Our flagship umbrellas have built in LED lights in the central hub.

CANOPY OPTIONS

Features

- 100% Sunbrella™ Marine solution-dyed fabric
- All fabrics can be cleaned, washed and are replaceable
- UV & Fade Resistant
- 10 year Sunbrella™ warranty
- Mould and Mildew Resistant
- Weight: 314 g/m2
- Sun protection - Skin Cancer Foundation's seal of approval



Stock Colour Options



Natural




Oyster



Cadet Grey



Taupe



Charcoal Tweed



Charcoal Grey




Black



Captain Navy

Full Sunbrella range is available as a custom, non-stock colour option.

Trend Colours Summer 19/20*




Rust



Silver



Linen



Sea

*Trend colours are non-stock and lead times may vary for non-stock colours.

BEST-IN-CLASS WARRANTY

Relax easy knowing your outdoor umbrella purchase is protected by the industries best warranty and customer support.



Fabric
Warranty



Frame
Warranty

MOUNTING OPTIONS

Surface Plate

For deck, patio and concrete mounting.



In-Ground Anchor

For mounting with a concrete footing.




Wall Fixings

For when ground mounting isn't possible.




Free-standing Base

For complete customised maneuverability.




Pavers are required for ballast and are not supplied.
Optional castor wheels shown.

SIZE & CONFIGURATION

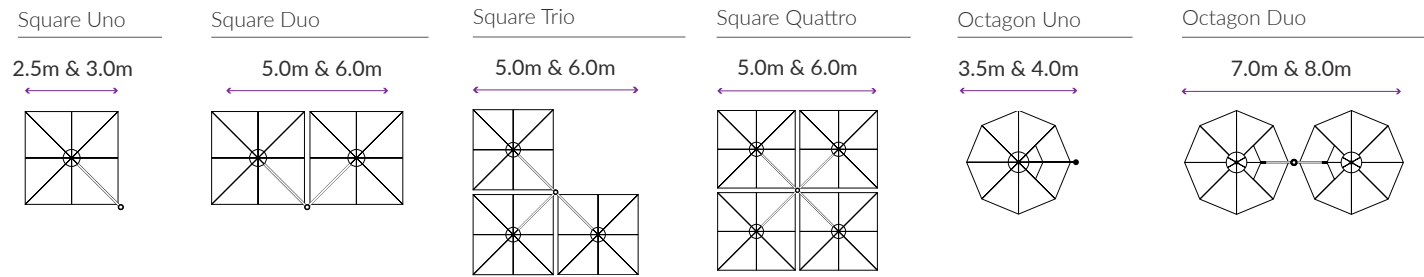

UMBRELLA DIMENSIONS

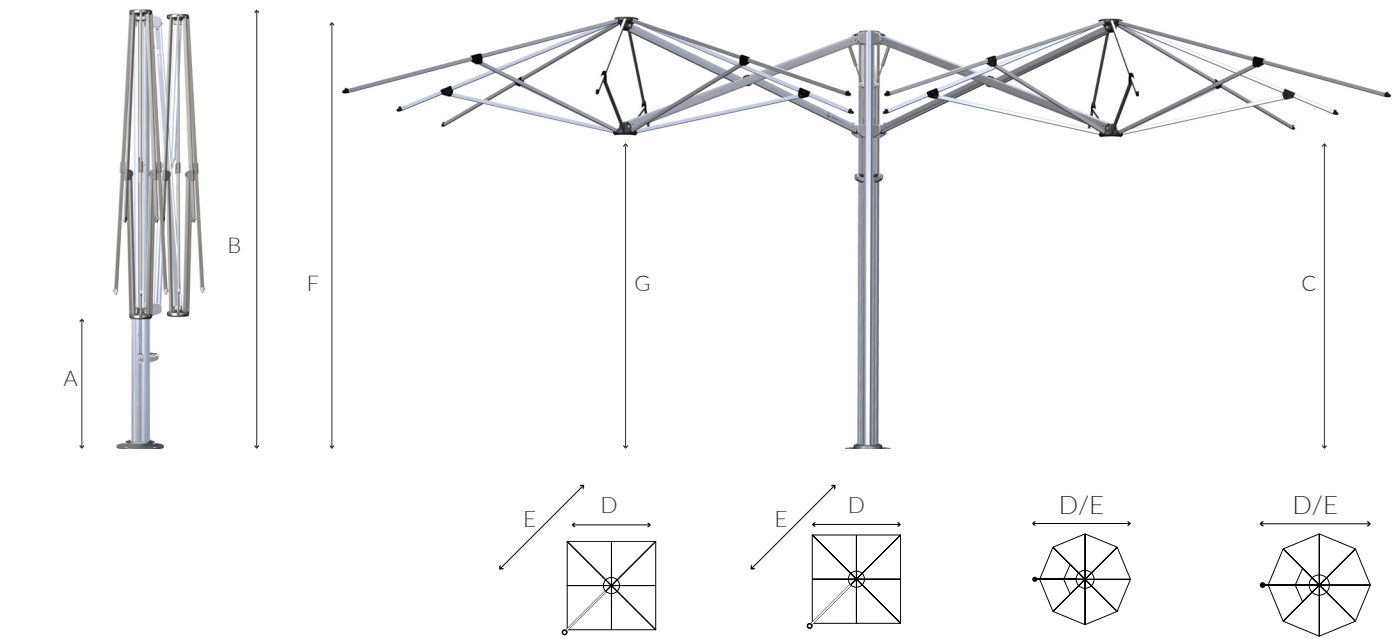

| Diagram Legend | | 2.5m | 3.0m | 3.5m | 4.0m |
|----------------|--|--------|--------|--------|--------|
| A | Ground to central frame hub when closed* | 870mm | 623mm | 1096mm | 848mm |
| B | Height of umbrella to top of mast cap* | 2916mm | 2916mm | 2916mm | 2916mm |
| C | Ground to lower outer edge of canopy* | 2235mm | 2232mm | 2249mm | 2190mm |
| D | Centre of mast to outside edge of canopy | 2665mm | 2993mm | 3500mm | 4000mm |
| E | Diagonal from centre of mast to corner | 3639mm | 4101mm | 3473mm | 3950mm |
| F | Total height to top of canopy* | 2905mm | 2830mm | 2985mm | 2908mm |
| G | Ground to central frame hub when open* | 2163mm | 2084mm | 2239mm | 2162mm |

*Portable Base installations will add 165mm to these measurements. Adding portable base wheels also will add a further 45-80mm/2-3". All sizings are +/- 2.5mm / 1/32" and subject to change without notice.